


TECHNICAL SHEET: MICROQUARZ CLASSIC

FIELDS OF APPLICATION

It is used as a coating for floors, walls, furniture, etc. where a natural finish is required, with a cement look where water marks are seen or produced by the application, also the possibility of a uniform finish without water.

WALL CONSUMPTION


1. PrimerQuarz (0,2 kg/m²) + Mesh + MicroQuarz BASE (1 kg/m²)
2. MicroQuarz BASE Color (0,8 kg/m²) * If a further coat of MicroQuarz BASE Color is required, the following is recommended (0,5 kg/m²)
3. MicroQuarz FINE Color (0,4 kg/m²)
4. Primer Finish (0,08 kg/m²) + Finish W TRP (0,12 kg/m²)

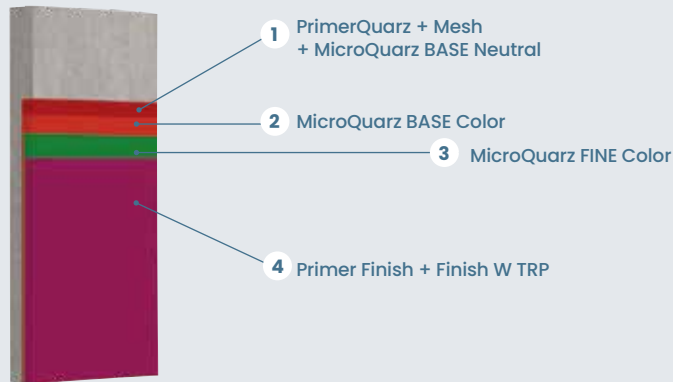

*On substrates with residual humidity, problems of efflorescence between the joints of the ceramic or terrazzo, or combined cement and ceramic, it is recommended to apply a coat of Primer AH with a consumption of 0.2 kg/m² and a minimum drying time of 8 hours, to avoid efflorescence and uniform absorption. Do not apply in the presence of phreatic humidity.

FLOOR CONSUMPTIONS

1. PrimerQuarz (0,2 kg/m²) + Mesh + MicroQuarz HardBASE (1,6 kg/m²)
2. MicroQuarz BASE Color (1,3 kg/m²)
3. MicroQuarz FINE Color (0,4 kg/m²)
4. Primer Finish (0,08 kg/m²) + Finish W TRP Radiant (0,12 kg/m²)

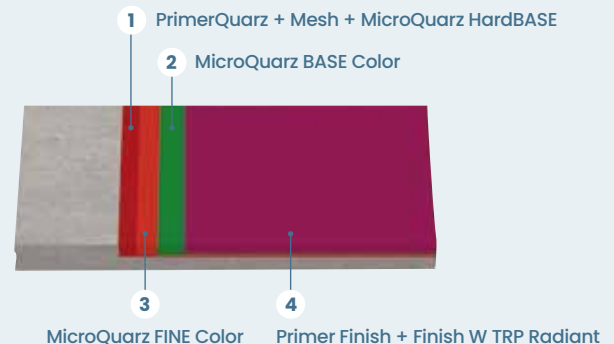

PROPERTIES

- Anti-dust and resistance to pedestrian traffic
- The product does not dry in the bottle
- Easy to clean and maintain
- Ready to use
- Excellent adherence on any support
- Matte, satin and bright finish
- Decorative aspect
- Able to outdoors