

FIELDS OF APPLICATION

It is used as a decorative coating on facades and walls, both indoors and outdoors, with a smooth structured or rough appearance, depending on the application. Anti-mold product. Finishing coating for SATE system.

CONSUMPTION FOR STRUCTURED FINISHING

STEP 1: AcriMur applied by roller as a primer 0,25 Kg/m²

STEP 2: AcriMur applied by trowel or stucco gun 1,5 Kg/m²

CONSUMPTION FOR SMOOTH FINISH


STEP 1: PrimerQuarz (0.15 Kg/m²) On porous substrate, over existing paint, no need to apply.

STEP 2: AcriMur Smooth finish (0.5 Kg/m²) applied by roller

AcriMur Smooth finish (1.5 Kg/m²) applied by trowel

PROPERTIES

- High range of colors
- High elasticity
- Very good adhesion
- High surface resistance
- No need of another product as primer
- Waterproof and breathable
- Roller and trowel application
- Drop, roller or striped finish
- Also available in a smooth finish, applied by trowel or roller

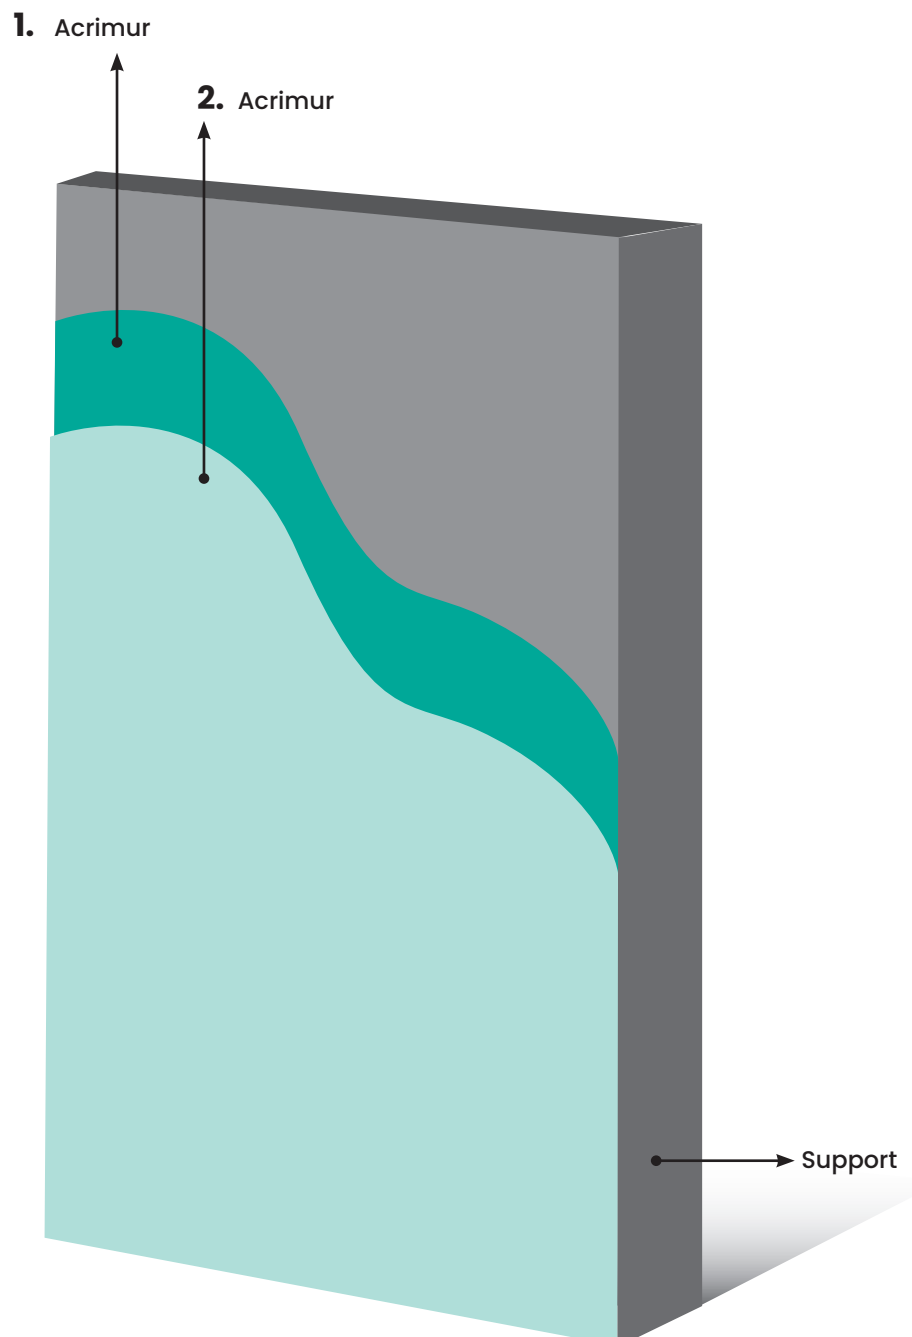

APPLICATION OF FACADE COVERING AcriMur

On a regularized, firm and stable support, with mineral, mortar, single-layer mineral characteristics, of mortar, monolayer, well adhered paint or similar, dilute one part of AcriMur with one part of clean water and apply by roller on the surface as a primer.

After 24 hours or when the primer has dried, segment the surface to allow the application and spread AcriMur with a trowel from bottom to top, avoiding overloads of material, leaving an even layer over the entire the thickness that allows the aggregate of the product.

After a few minutes and when the material is in the process of setting, trowel with a plastic trowel creating circles for a Rulo finish or by troweling straight up and down for a striped finish.

For spray application, dilute the product with a low portion of water until it is workable and apply it in regular circles all over the surface.

For AcriMur smooth finish, apply with a roller the primer PrimerQuarz on porous substrates (not necessary on existing paint), wait about one hour for it to dry and then apply the product by roller, trowel in thin layers, at the level of the aggregate leaving the surface without trowel marks.

COMMENTS

Thin film coating for the protection and decoration of facades and exterior walls.